

TMC-8D31-000

GaAs PIN photodiode TO-46 metal can

FEATURES:

- Industry standard TO-46 package with cap lens.
- Optimized for fiber optic application.
- High coupling efficiency to multi-mode fibers directly.
- Low dark current and low capacitance.



ELECTRO-OPTICAL CHARACTERISTICS:

PARAMETERS	SYMBOL	MIN	TYP	MAX	UNIT	TEST CONDITIONS
Responsivity ⁽¹⁾	R	0.50	0.60		A/W	V _R =5V, λ=850nm
Dark Current	I _D			2	nA	V _R =5V, T _A =25°C
Breakdown Voltage	V _{BD}	50			V	I _R =10μA
Bandwidth	BW	1.5			GHz	V _R =5V
Capacitance ⁽²⁾	C		1.2	1.5	pF	V _R =5V, f=1 MHz

Notes:

1. The responsivity is measured with a receptacle package, using an 850 nm VCSEL as the optical light source to the 50/125 or 62.5/125 μm multi-mode fibers.
2. Sensitive area is typical 120μm in diameter.

ABSOLUTE MAXIMUM RATINGS:

PARAMETERS	MIN	MAX	UNIT	CONDITIONS
Storage Temperature	-40	125	°C	
Operating Temperature	-40	85	°C	
Lead Solder Temperature		260	°C	10 seconds

Fig. 1 Typical Dark Current and Forward Current

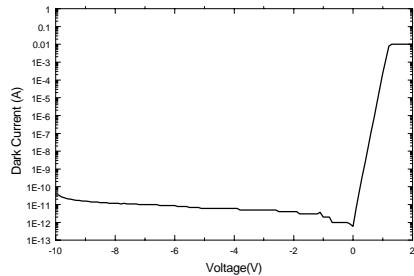


Fig. 2 Typical Photo-Current

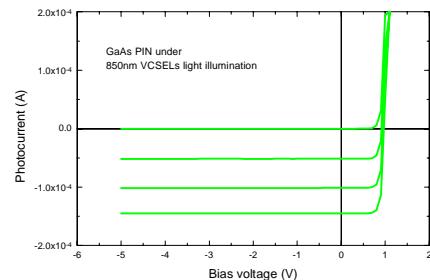


Fig. 3 Typical Breakdown Curve


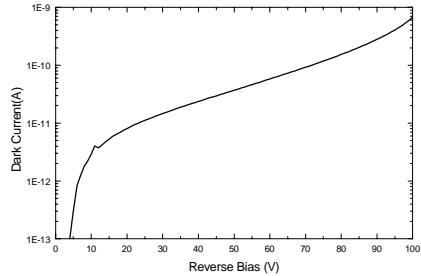


Fig. 4 Typical C-V Curve



OUTLINE DIMENSIONS:

UNIT:mm

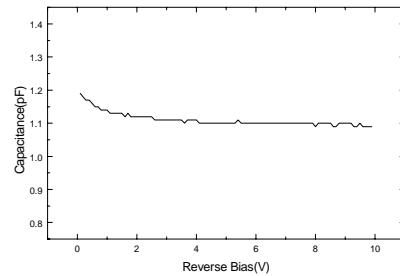