

### Features

- Wavelength : 405nm(Typ.)
- Output power : 20mW
- Threshold current :  $I_{th}=26\text{mA}$ (Typ.)
- Package :  $\phi 5.6\text{mm}$  with PD

### Applications


- Laser module
- Industrial Use

### Absolute Maximum Ratings

( $T_c=25^\circ\text{C}$ )

Parameter	Symbol	Ratings	Unit
Light Output	$P_o(\text{CW})$	35	mW
Reverse Voltage (LD)	VR	2	V
Operating Temperature <sup>1)</sup>	$T_{opr}$	0 to +75	$^\circ\text{C}$
Storage Temperature <sup>1)</sup>	$T_{stg}$	-40 to +85	$^\circ\text{C}$

1) Case temperature.

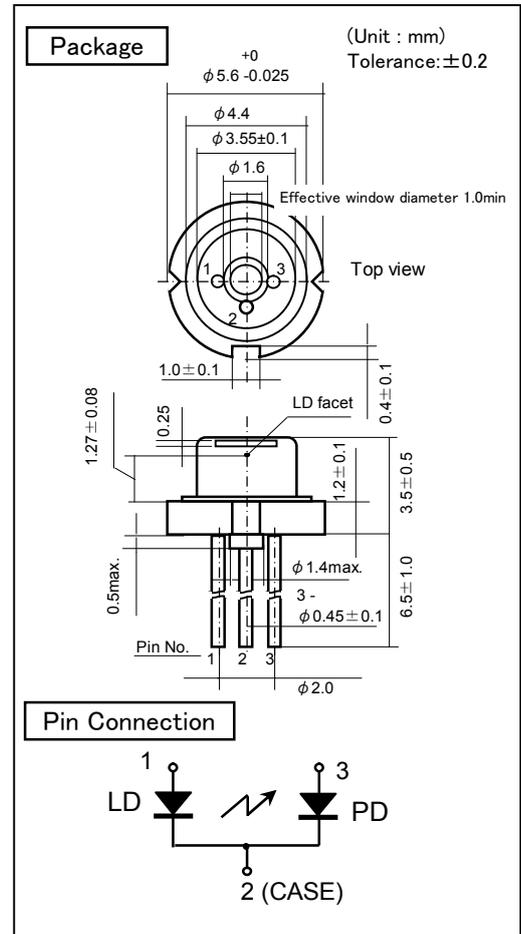

### Electrical and Optical Characteristics <sup>2) 3) 4) 5)</sup>

( $T_c=25^\circ\text{C}$ )

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	
Threshold Current	$I_{th}$	CW	-	26	60	mA	
Operating Current	$I_{op}$	$P_o=20\text{mW}$	-	55	80	mA	
Operating Voltage	$V_{op}$	$P_o=20\text{mW}$	-	4.8	5.6	V	
Lasing Wavelength	$L_p$	$P_o=20\text{mW}$	400	405	410	nm	
Beam <sup>6)</sup> Divergence	Perpendicular	$Q_v$	$P_o=20\text{mW}$	16	19	23	$^\circ$
	Parallel	$Q_h$	$P_o=20\text{mW}$	6	8.5	12	$^\circ$
Off Axis Angle	Perpendicular	$dQ_v$	$P_o=20\text{mW}$	-3	-	3	$^\circ$
	Parallel	$dQ_h$	$P_o=20\text{mW}$	-3	-	3	$^\circ$
Differential Efficiency	SE	$P_o=20\text{mW}$	0.7	1.1	-	mW/mA	
Monitoring Output Current	$I_m$	$P_o=20\text{mW}$	0.1	0.2	0.5	mA	

2) Initial Values. 3) All the above values are evaluated with Tottori sanyo's measuring apparatus.

4) It makes a typical value a Reference Value. 5) Measurement condition : CW. 6) Full angle at half maximum.

**Note : The above product specification are subject to change without notice**